

Itowa

Radio Remote Control Systems

35
1986 / 2021
Years

ITWINCONTROL

Software Scada



ITWINCONTROL

ITWINCONTROL is a SCADA software package that works through Windows system ideal for a total control of applications requiring centralised management on a personal computer.

The software designed by Itowa, allows the control of radio remote units via radio model LEVEL ITW and the visualization of all types of signals centrally from a PC.



ITWINCONTROL


Software Scada

The ITWINCONTROL software consists of several packages or applications that offer different degrees of performances and options. Each package is installed individually depending on the needs of each system and the conditioning factors of each installation.

The personalized design of each application guarantees a totally adapted control according to the client's needs.

TECHNICAL SPECIFICATIONS ITWINCONTROL

System	Windows
Applications	DRV Data acquisition and radio communication package DRV-SMS GSM communication package and SMS to mobile phones ITWINEDIT: Visual management and monitoring system editing software ITWINVIEW: Graphic display of the signals. Actuation and control of signals and management of alarms on screen ITWEBSERVICE: Network server configuration ITWEBCLIENT: Mobile APP to visualize the signals of each station GRAFVIEW: Signal evolution graphics
Automatism	Customizable for each application
Graphics	Yes
Alarms	Yes
GSM	Sending SMS Activation of signals via mobile phone

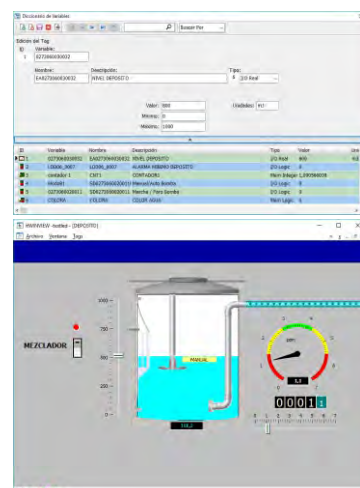

02/2021

DRIVER - DRV

The DRV package manages communication, signal and automation configuration and the database.

DRV SMS

The DRV SMS package manages the SMS service and the alarm sending through a modem installed on the PC.

ITWINEDIT

Software for editing the visual management and supervision system used by the network operator/supervisor. Allows you to edit the different Scada for each network or application. The edition is focused on the creation of independent and customized projects for each network or installation.

The editing process covers from the creation and design of the windows or screens to the different objects and variables associated with the signals and actions to be controlled.

It can be linked to the DRV to configure the signals of each station. You can also work with variables and store them in your own database.

ITWINVIEW

Basic executable Scada (no user-editable option)

ITWEBSERVICE

Server for the network or project

ITWEBCLIENT

Mobile APP. It connects to the ITWEBSERVICE and allows to visualize the signals of each station.

GRAFVIEW

Evolution graphs visualization and statistics of the application's signals.



Design and specifications subject to change without notice



Faraday, 159 - 08224 TERRASSA (Barcelona) SPAIN
Telf. +34 93 733 9850 - Fax +34 93 789 1351
<http://www.itowa.com> - e-mail: info@itowa.com